Proceedings of the asmeconf
International Examples Congress and Exposition
AIECE21
January 20, 2021, Cambridge, MA

AIECE2021-0001

EXAMPLE OF LuaLaTeX WITH ASMECONF.CLS FOR ODE INTEGRATION

John H. Lienhard V*
Department of Mechanical Engineering
Massachusetts Institute of Technology
Cambridge, MA

ABSTRACT

This paper is an example of using `asmeconf` *with* LuaLaTeX *to solve an ODE initial value problem using a fourth-order Runge-Kutta method and to plot the result using* `PGFPLOTS`. *The use of a landscape figure is also illustrated. References are given for further reading.*

Keywords: asmeconf, LuaLaTeX, ODE, pgfplots, landscape

NOMENCLATURE

A	Constant parameter [–]
t	Time [s]
$y(t)$	Position [m]

1 INTRODUCTION

LuaLaTeX is built upon the Lua programming language [1]. By directly using Lua code in a LaTeX file, we can accomplish a wide range of tasks, as illustrated in the open-access paper by Montijano et al. [2]. In the present example, we follow Montijano et al. in solving a nonlinear first-order ordinary differential equation and plotting the result—all within a single LaTeX file!

2 SOLUTION TO AN INITIAL VALUE PROBLEM

We consider an initial value problem like that of Montijano et al.:

$$y'(t) = A \cdot y(t) \cos\left(t + \sqrt{1 + y(t)}\right) \text{ with } y(0) = 1 \qquad (1)$$

Here, A is a constant. We may adopt a fourth-order Runge-Kutta algorithm for the integration, which we shall perform to $t = 30$ s using a 400 point discretization. The details of the Runge-Kutta algorithm and a listing of the code are given in Montijano et al. (You can also read the code in the present `.tex` file.)

The algorithm is implemented directly in the preamble of this file, and the results are plotted in Fig. 1 for $A = \{0.25, 0.5, 0.75, 1.0\}$. Plotting is done using the `PGFPLOTS` package [3].

Landscape figures may be produced at full-page size by putting `\usepackage[figuresright]{rotating}` (Fig. 1) into your `.tex` file's preamble and using the `sidewaysfigure*` environment [4].

3 CONCLUSION

LuaLaTeX enables numerical computations within a LaTeX environment. By combining this capability with `PGFPlots`, the need for separate numerical and/or graphics packages can be reduced.

ACKNOWLEDGMENTS

The example shown in this paper is directly based on an example given by Montijano et al. [2]. Additional examples, such as the Lorenz attractor, are contained in that paper.

REFERENCES

[1] lerusalimschy, Roberto, de Figueiredo, Luiz Henrique and Celes, Waldemar. *Lua 5.3 Reference Manual*. Pontifical Catholic University, Rio de Janeiro, Brazil (2017). URL https://www.lua.org/manual/5.3/.

[2] Montijano, Juan I., Pérez, Mario, Rández, Luis and Varona, Juan Luis. "Numerical methods with LuaLaTeX." *TUGboat* Vol. 35 No. 1 (2014): pp. 51–56. URL https://tug.org/TUGboat/tb35-1/tb109montijano.pdf. Open access.

[3] Feuersänger, Christian. *Manual for Package PGFPLOTS*, Version 1.17. Comprehensive TeX Archive Network (2020). Accessed January 4, 2021, URL https://ctan.org/pkg/pgfplots.

[4] Fairbairns, Robin, Rahtz, Sebastian and Barroca, Leonor. "A Package for Rotated Objects in LaTeX." Version 2.16d. Comprehensive TeX Archive Network (2016). Accessed October 2, 2019, URL https://www.ctan.org/pkg/rotating.

*Corresponding author: lienhard@mit.edu
Version 1.04, October 31, 2026

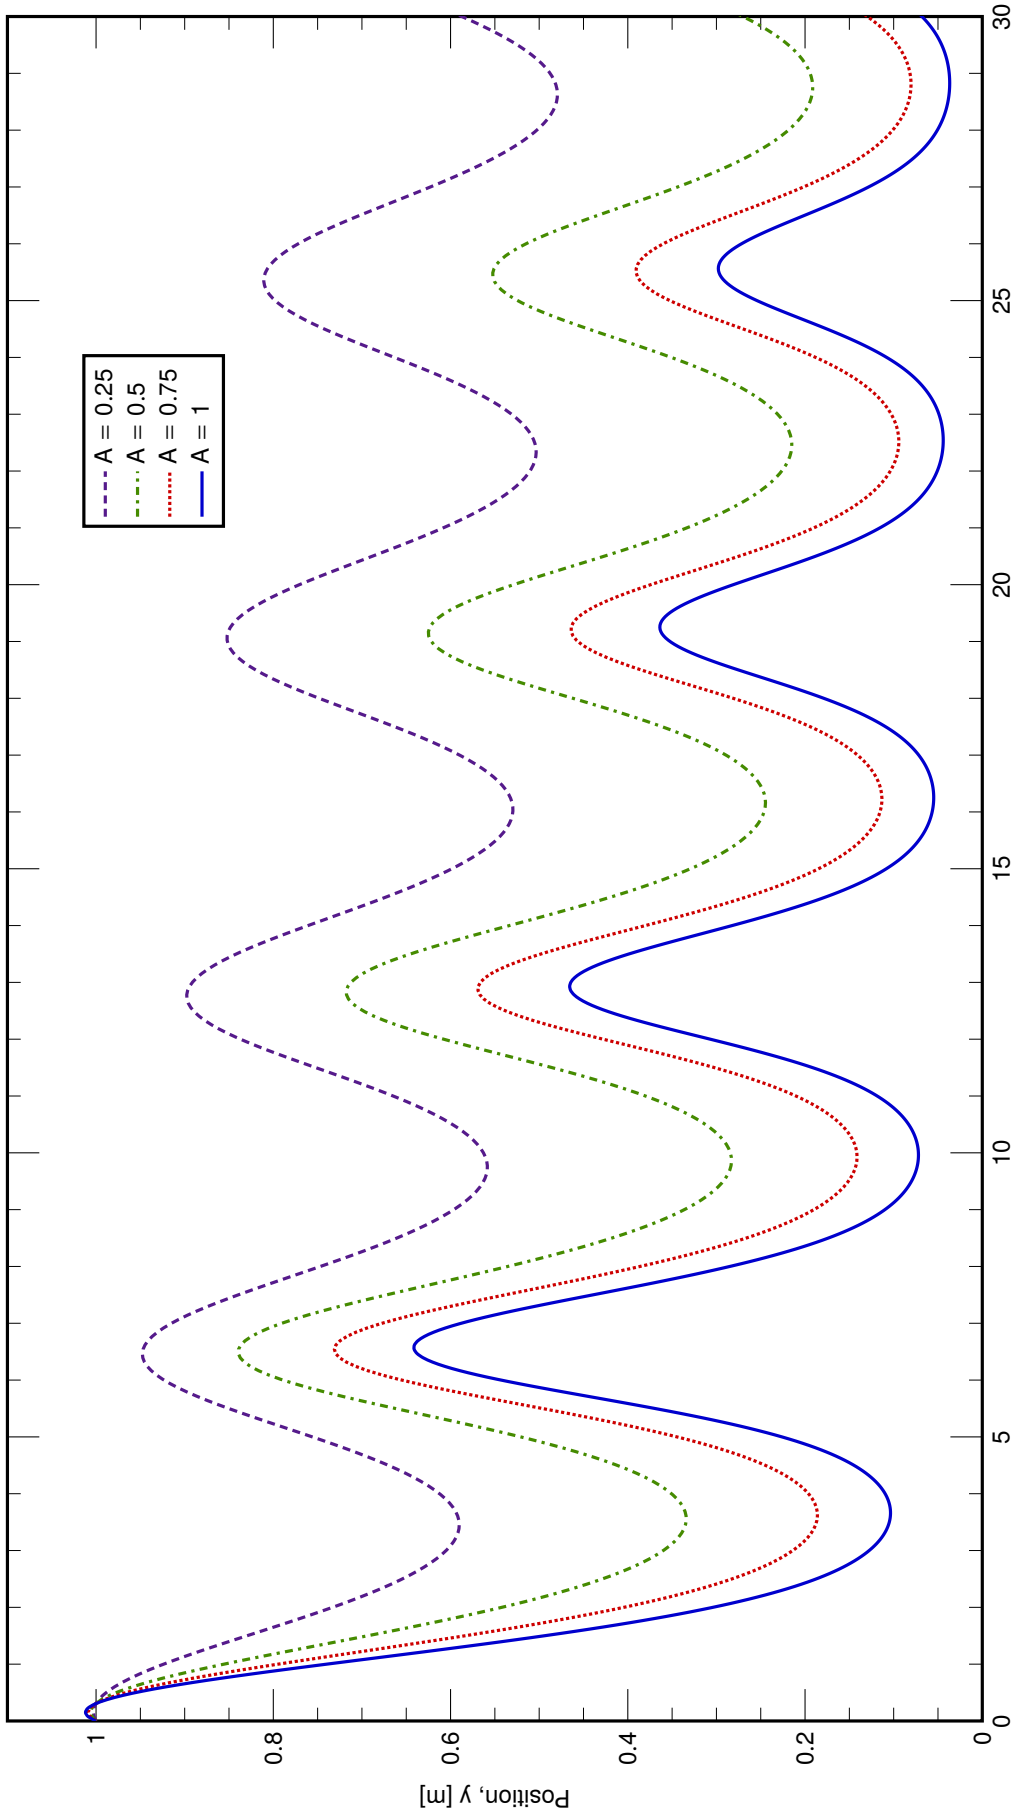


FIGURE 1: A trial of pgfplot with Luacode Runge-Kutta integration